


European Concealed Hinges




- Material: steel, cold rolled
- Assembling: clip-on
- Closing: soft-close
- Opening angle: 105°
- Hinge cup depth: 11.5 mm
- Hinge cup diameter: 35 mm
- Hinge cup drilling distance (K): 3 - 7 mm
- Door thickness: 14 - 22 mm
- Mounting: screw or press-fit dowel
- Adjustment: horizontal side by screw
vertical height by screw
in-and-out depth by cam

Hinge cup drilling option

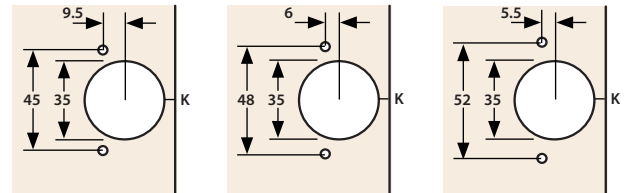


Mounting option

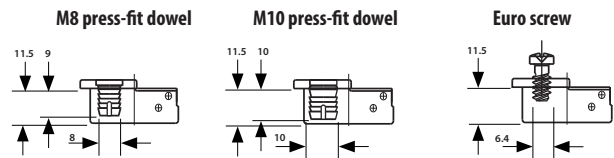

56156 30° CORNER, SOFT-CLOSE



Installation guide




X/D \ H \ K	4	5	6	7
0	37	36	35	34
	3	4	5	6
2	37	36	35	34
	1	2	3	4
4	37	36	35	34
	-1	0	1	2

56153 45° CORNER, SOFT-CLOSE



Installation guide



X/D \ H \ K	4	5	6	7
0	37	36	35	34
	3	4	5	6
2	37	36	35	34
	1	2	3	4
4	37	36	35	34
	-1	0	1	2

Note: The formulas can be used according to different types of hinge arms and they need the figures of both the hinge cup drilling distance "K" and plated height "H". Dimensions in mm